

## VST-862-F1 Camera PIR Sensor

Optimum Camera Coverage,  
Premium Image Quality



- Extensive Communication Range
- Advanced Penetration Rate
- Enhanced Data Transfer Speed
- Dynamic Speed Adjustment Algorithm
- Optimum Camera Coverage

The VST-862-F1 is Climax's next generation PIR motion sensor camera leveraging F1 technology with long RF communication range, enhanced penetration and sensitivity rate, immediate image transfer rate, and advance dynamic speed adjustment algorithms. The VST-862-F1 has a unique antenna designed with maximized receiver sensitivity to ensure precise transmission and reception of signals, resulting in enhanced penetration rate, allowing users and installers to flexibly set up on large or complicated premises.

VST-862-F1 features advanced dynamic speed adjustment algorithms to maintain high stable reception that automatically adjusts accordingly based on signal quality and further enhances frequency reliability to increase data transfer speed, resulting in instant delivery of alarm reporting.

With wide-angle camera lens, the VST-862-F1 features complete coverage with no blind spots, plus its combination of color VGA/QVGA images ensures that all details vital to visual alarm verification are promptly notified to users. Technologically advanced and aesthetically appealing, the VST-862-F1 stands out as a broadly applicable device ready to make your home or business safer and smarter.

### Features

- Advanced Dynamic Speed Adjustment Algorithms to maintain stable and fast image transfer speed based on signal quality
- Wide camera field of view leaves no blind spots
- Captures one, three, or six images when irregular motion is detected
- Two adjustable sensitivity levels: High / Normal
- Three alarm image processing options:
  - One color VGA (640x480 pixels) alarm images
  - Three color QVGA (320x240 pixels) alarm images
  - Six color QVGA (320x240 pixels) alarm images
- F1 technology accelerates the speed of signal transmission, boosts communication range
- Low battery consumption
- Delivers one image upon request
- LEDs indicate faults and test modes
- Regular supervision signals ensure proper operation
- Tamper protection to prevent unauthorized sabotage
- Low battery detection
- Wall bracket for flexible installation
- Optional mounting accessory: Rotating holder
- Compatible with Climax's F1 gateways/control panels
- Compatible with Climax's Repeater RP-29 series (VST-862-P5-F1 only)
- Suitable for security and home automation usage


## VST-862-F1 Camera PIR Motion Sensor

### Specifications

PIR Motion Sensor	
Range	10 meters
Horizontal Angle	90° degrees
Installation Height	2 meters
Camera	
Lens	VGA CMOS Camera
Field of View	(H) 102° degrees
Resolution	640 x 480 pixels or 320 x 240 pixels
Mechanical	
Frequency	433 MHz / 868 MHz
Power Source	3V, CR123A Lithium battery x 3 1.5V, Alkaline battery x 2
Battery Life	Lithium: 8 years* Alkaline: 4 years*
Range	400m - 900m in open space
Mounting Options	Wall / Corner mount Optional accessory: Rotating holder
Rotating Angles (with Rotating Holder only)	Vertical: 70° angle Horizontal: 80° angle
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	VST-862: 52 mm x 72 mm x 120 mm Rotating holder: 70 mm x 50 mm x 34 mm

\* Note: Actual battery life may vary with product settings, operating environment, and usage patterns.

### Compatible with Rotating Holder (Optional)

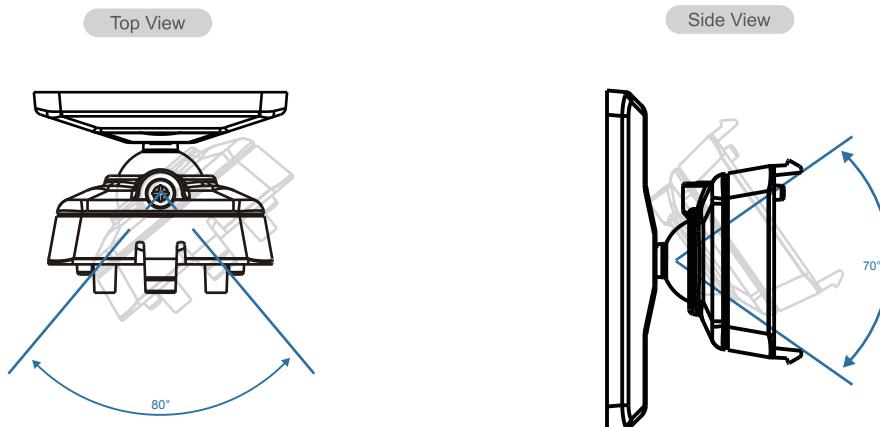

## VST-862-F1 Camera PIR Motion Sensor

### *Ordering Information*

---

**VST-862-F1** Camera PIR Motion Sensor with warm white fill light and extensive RF range, compatible with Climax F1 gateways

**VST-862-IL-F1** Camera PIR Motion Sensor with infrared (IR) fill light and extensive RF range, compatible with Climax F1 gateways

**Rotating Holder** Optional mounting accessory