

RG-ES108GD

8-Port 10/100/1000 Mbps Unmanaged Non-PoE Switch



Highlights

- 8-Port 10/100Mbps desktop unmanaged non-PoE switch
- Unmanaged switch, which is visible on Ruijie Cloud APP
- Large buffer for smooth data transmission
- High network reliability
- High-quality design
- Adaptation to various scenarios

Highlight Features

Unmanaged Switch, Which Is Visible on Ruijie Cloud*

* If an unmanaged switch needs to be visualized on Ruijie Cloud, at least one managed switch needs to be deployed on the same network



High-quality Makes Network Reliable


Stable without frequent reboot



Highlight Features

Better Quality Design

Strict standards in PCB design and component selection

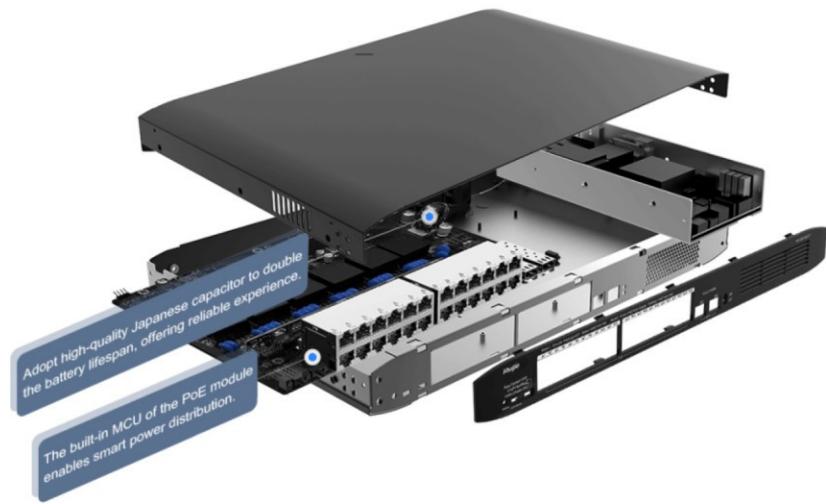

Designed for Various Scenarios



Product Information

| | |
|------------------|------------|
| Model | RG-ES108GD |
| Product Category | Layer 2 |

Hardware Specifications

| | |
|---|--|
| Model | RG-ES108GD |
| Product Information | |
| Warranty | 3 years |
| Port Specifications | |
| Total number of RJ45 ports | 8 |
| Number of 10/100/1000BASE-T ports | 8 |
| Power Supply and Consumption | |
| Power input | DC adapter: <ul style="list-style-type: none">Rated input voltage: 100 V AC to 240 V AC, 50 Hz to 60 HzMaximum input voltage: 90 V AC to 264 V AC, 47 Hz to 63 HzRated input current: 0.3 A Output: <ul style="list-style-type: none">Rated output voltage: 5 V DCMaximum output current: 1 A |
| Maximum power consumption | 5 W |
| Power supply | DC power adapter |
| System Specifications | |
| Flash memory | 1 MB |
| Forwarding rate | 11.90 Mpps |
| Switching capacity | 16 Gbps(bit/s) |
| Dimensions and Weight | |
| Casing | Metal |
| Product dimensions (W x D x H) | 160 mm x 75 mm x 24 mm (6.3 in. x 2.95 in. x 0.94 in.) |

Hardware Specifications

| Model | RG-ES108GD |
|--|--|
| Weight | 350 g (0.77 lbs) (without packaging materials) |
| Shipping weight | 0.60 kg (1.32 lbs) |
| Environment and Reliability | |
| Fan | Fanless design |
| Cooling | Natural cooling |
| Acoustic noise | No |
| Mounting options | Wall/Desk |
| Hot swapping of cables | Hot swapping supported by the service port and power connector |
| MTBF | 200,000 hours |
| Operating temperature | 0°C to 40°C (32°F to 104°F) |
| Storage temperature | -40°C to +70°C (-40°F to +158°F) |
| Operating humidity | 10% RH to 90% RH (non-condensing) |
| Storage humidity | 5% RH to 95% RH (non-condensing) |
| Altitude | Operating altitude: -500 m to +5,000 m (-1,640.42 ft. to +16,404.20 ft.) Storage altitude: -500 m to +5,000 m (-1,640.42 ft. to +16,404.20 ft.) |
| ESD protection | Air discharge: 8 kV Contact discharge: 6 kV |
| Surge protection | Service port: ±4 kV for common mode Power connector: ±2 kV for common mode and ±1 kV for differential mode |
| Certification and Regulatory Compliance | |
| EMC | EN 55032 EN 61000-3-2 EN 61000-3-3 EN 55035 EN 300 386 |
| Safety compliance | EN 62638-1 |
| Certification | CE |



Package Contents

| Model | RG-ES108GD |
|----------------------|------------|
| Manual | |
| User Manual | 1 |
| Warranty Card | 1 |

Ruijie | Reyee

 **Redefine your easy network**



Ruijie Networks Co., Ltd.
Official Website: <https://Reyee.Ruijie.com>