

UNV-Link Pro connect Box


GCB01-B7



Specifications

Model	GCB01-B7
Interface	
Network	4 × RJ45 10 M/100 M Base-TX Ethernet Network Port 1 Support POE (IEEE802.3af) Output Network Port 4 Support PSE Voltage Test
Voltage Test	1 x PSE Voltage Test (PSE voltage detection Range: 1V~56V; IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt) 1 x DC voltage Test (DC voltage detection Range: 1V~56V)
Network	
Wi-Fi	2.4G Wi-Fi (IEEE802.11b/g/n)
Structure / Environment	
Battery Capacity	18650 lithium battery, 7500 mAH
Power Input	1 × DC 5 V/2 A max, type-c
Power Output	1 × DC 12 V/1 A output; 1 × DC 5 V/1 A output, type-A
General	
LED Indicator	System indicator, WiFi indicator, Battery indicator
Dimensions	130 × 85 × 33mm (5.1" × 3.3" × 1.3") (L x W x H)
Working Environment	-20 °C to 60 °C (-4 °F to 140 °F), Humidity: ≤ 95% RH (non-condensing)
Reset Button	Support

Dimensions

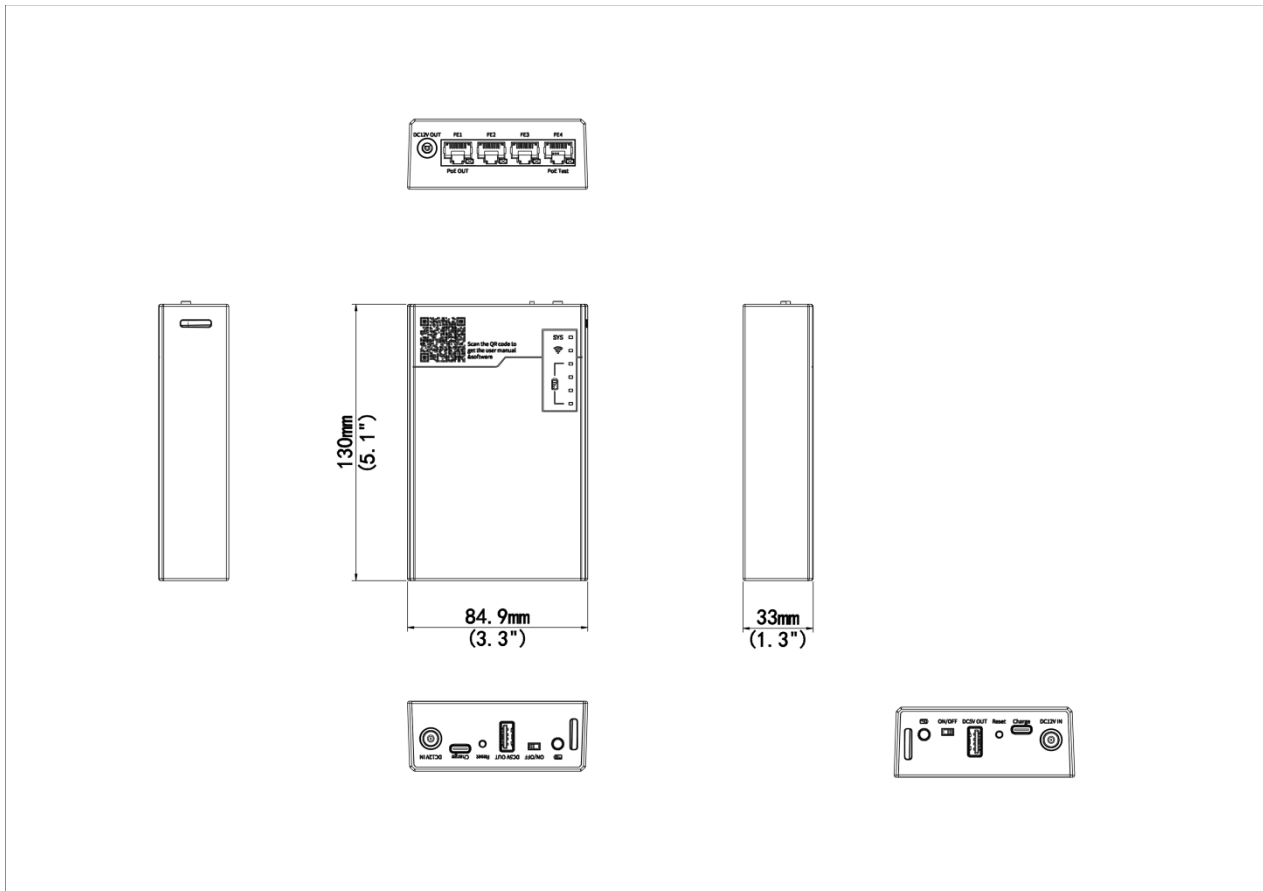

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2024-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.